
# MECHANICAL CONNECTORS

## **USMLx Aluminium Lugs**

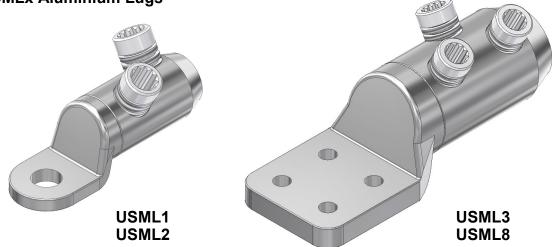

## **Application:**

Termination of circular stranded aluminium or copper conductors.

#### Cable Range:

Connector	Stranded Core C.S.A. (mm²)			
Reference	Min	Max		
USML1	25	120		
USML2	50	240		
USML3	240	500		
USML8	400	630		

#### **Product Description:**

The '**USML**' range of mechanical terminations are manufactured from a single piece hot forging thereby ensuring a water proof connection.

The product utilise the patented universal range taking shear bolts. (USA Patent No's 6209424 & 6321624)

It is recommended that the appropriate socket is to be used at all times, typical examples shown below.




'JTS/9' 1/2" sq Driver



'USMLx' Aluminium Mechanical Termination with Moisture/Contaminant Block For Medium Voltage Applications

# MECHANICAL CONNECTORS

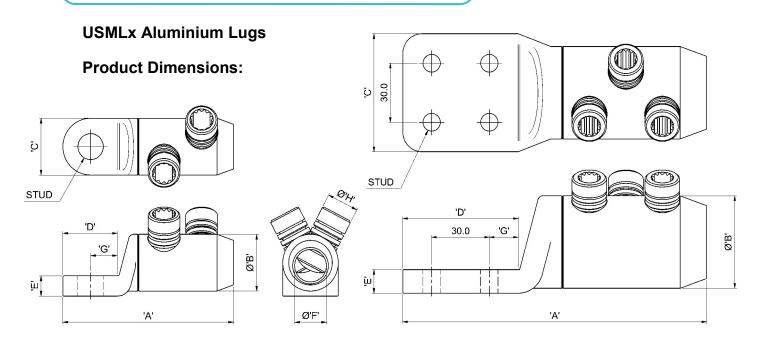

Connector Reference	Dimensions (mm)									
	'A'	'ØB'	'C'	'D'	'E'	'ØF'	'G'	'ØH'	STUD	
USML1	88	28	28	29.5	10	16	15.5	M16	M12	
USML2	98	34	32	33.5	12	21	17.5	M16	M12	
USML3	158	47	60	60	12	30	15	M18	4 x M8	
USML8	158	51	60	60	14	34	15	M18	4 x M8	

**Material:** Aluminium Alloy (Electro-Tinned)

Test Specification: TBC

Test Report No: TBC

#### Fitting instructions:

- 1. Strip insulation from each core equal to the depth of the bore.
- 2. Wire brush the exposed conductor cores and wipe clean (optional).
- 3. Align and position the conductor cores in each of the bores ensuring that the core is fully inserted to the centre wall.
- 4. Fit the universal shear screws within the connector and torque tighten one turn at a time, using the correct socket, until the bolts have sheared.
- 5. De-burr and clean the connector as appropriate ensuring the profile of the screws are level with the connector body and leaving no sharp edges.

